MIDMARK®

Installation Instructions

95 Flat Top Table

REQUIRED TOOLS

7/16” Socket Wrench
Phillips Screwdriver
Level

INSTALLATION (1

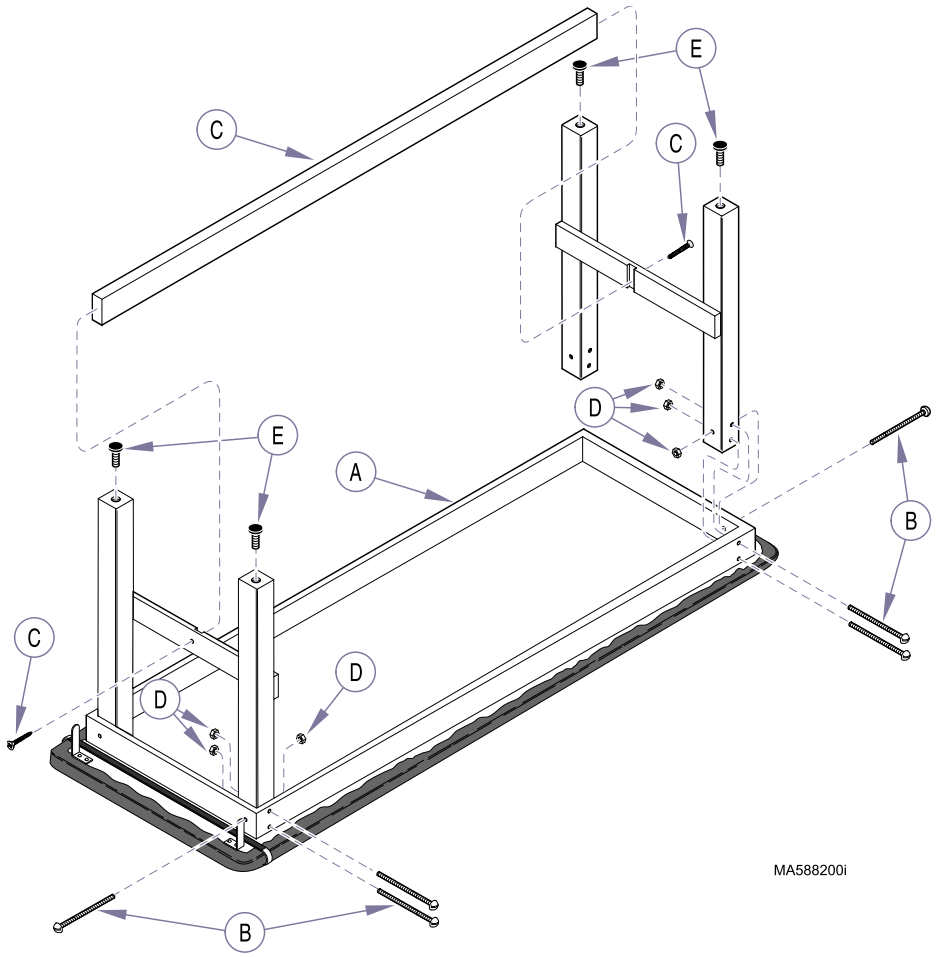

A. Lay table top *[upholstered side down]* on a clean, stable surface.

B. Position leg assemblies *[w/notches to inside]* and secure to table top using carriage bolts & nuts.
Note: *Do not tighten nuts at this time.*

C. Install cross member and secure using drywall screws.

D. Tighten nuts.

E. Install leveling screws.

© Midmark Corporation - 2001

MIDMARK®
Midmark Corporation, Versailles, Ohio 45380 U.S.A.
(937) 526-3662 FAX (937) 526-5542

003-0550-00 Rev. B (11/01)

INSTALLATION (2

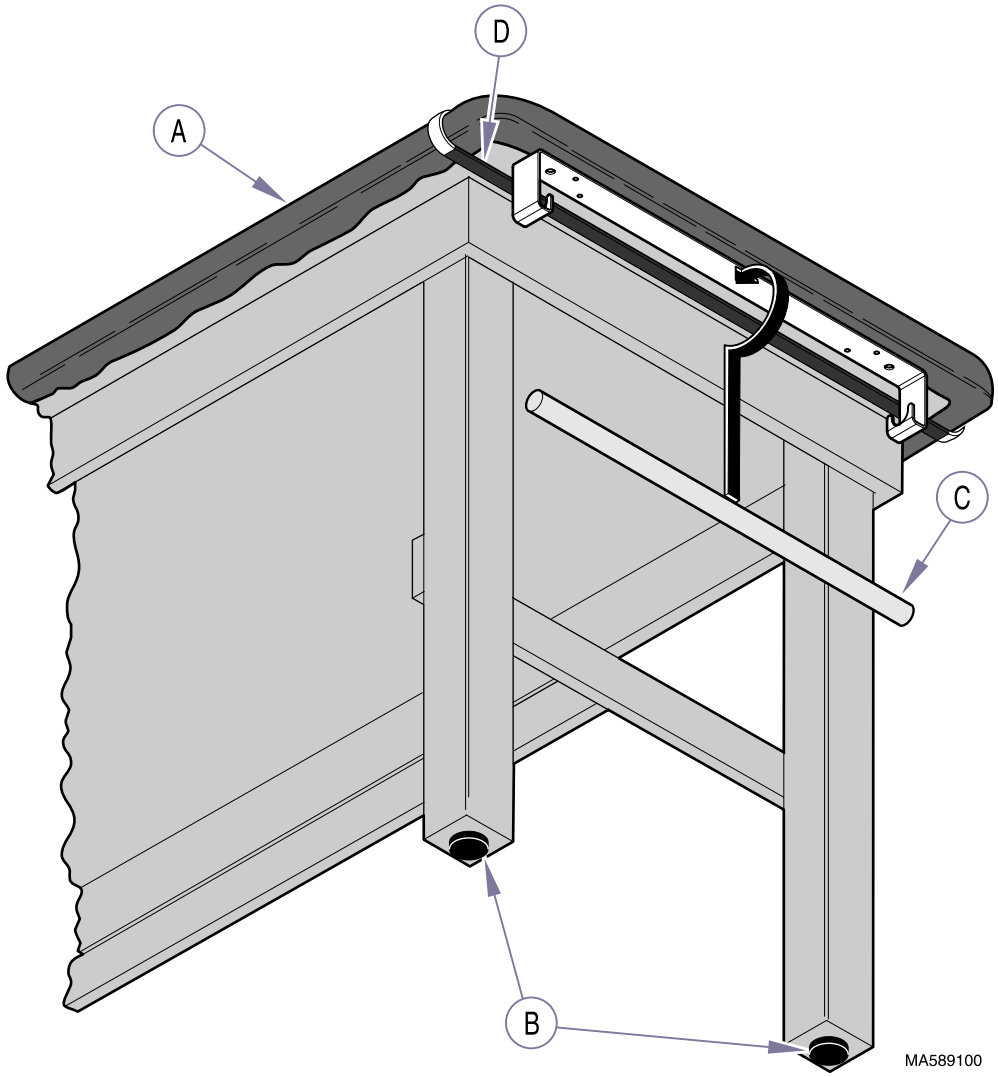

A. Set table upright and check stability. *[Tighten carriage bolts / nuts if necessary]*

B. Adjust leveling screws until table is level.

C. Install dowel rod.

D. Install paper tear strips.

E. ***Optional:*** Center shelf between legs and lay flat.

© Midmark Corporation - 2001